


# Compact I/O Module for **CC-Link IE Field Basic**

8 IO-Link Master Channels 4A+4B  
ELBC-8IOL-004B

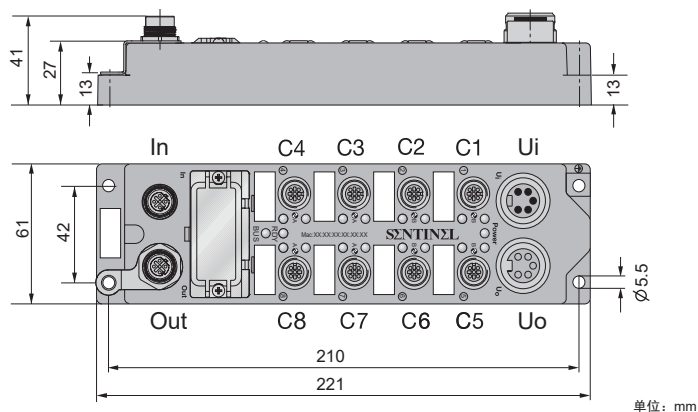

- CC-Link IE Field Basic remote I/O module
- Integrated Ethernet Switch
- Support 100Base-TX
- 2XM12,4-pin,D-code,Ethernet Fieldbus connection
- 8 IO-Link Master Channels
- IO-Link Protocol 1.1
- IO-Link master port 4 class A + 4 class B
- M12 ports for IO-Link master, 5-pin
- Impact and vibration resistance
- Fully potted module electronics
- Copper-plated nickel connector
- Protection classes IP67


|                                |                 |
|--------------------------------|-----------------|
| Model                          | ELBC-8IOL-004B  |
| Supply voltage                 | 24VDC $\pm$ 10% |
| Operating current              | < 200mA         |
| Module power (U <sub>B</sub> ) | ≤8A             |
| Load power (U <sub>L</sub> )   | ≤8A             |

|                         |                                                                                                                            |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------|
| IO-LINK port parameters |                                                                                                                            |
| Number of ports         | 8 (C1...C8)                                                                                                                |
| Connectivity inputs     | M12 , A-code , 5-pin                                                                                                       |
| Port supply current     | Rated 1A, Max 2A: UB from pins 1,3;<br>C1...C4, C5...C8 ≤ 4A each.<br>Max 2A: UL from pins 2,5;<br>C1,C2, C5,C6 ≤ 4A each. |



|                        |                                                   |
|------------------------|---------------------------------------------------|
| IO-LINK parameters     |                                                   |
| SIO model              | Not Supported (Pin 4 cannot be used as common IO) |
| IO-Link Pin definition | Pin 4 in IOL mode                                 |
| IO-Link Port type      | Class A (C3 C4 C7 C8)+Class B(C1 C2 C5 C6)        |
| IO-Link specification  | Version 1.1                                       |
| Frame type             | Supports all specified frame types                |
| Support Device         | Maximum 32Bytes Input / 32Bytes Output            |
| Transmission rate      | 4.8kbps(COM1) / 38.4kbps(COM2) / 230.4kbps(COM3)  |

|                                   |                                                                                     |
|-----------------------------------|-------------------------------------------------------------------------------------|
| CC-LINK IE Field Basic            |                                                                                     |
| Number of communication interface | 2                                                                                   |
| Transmission standard             | 100Base-TX                                                                          |
| Auto-negotiation                  | Supported                                                                           |
| Auto-MDI/MDIX                     | Supported                                                                           |
| Maximum transmission rate         | 100Mbit/s                                                                           |
| Fieldbus connection technology    | 2x M12, 4-pin, D-coded                                                              |
| Number of occupied stations       | 1...4                                                                               |
| Default IPv4 address              | 192.168.3.* (* is the hexadecimal number corresponding to the rotary code switch)   |
| IP address setting function       | Support IPAddressSet port number: 61451;<br>only the network segment can be changed |
| Default subnet mask               | 255.255.255.0                                                                       |
| Communication data format         | the binary                                                                          |
| Operating temperature             | -20...+55℃                                                                          |


## Power Supply Connector 7/8"




## IO-LINK Port Connector M12



## Bus Connector M12



|                             |                     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                     |   |        |   |   |   |  |             |        |  |  |  |        |  |  |  |      |   |   |   |   |   |   |   |   |
|-----------------------------|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|--------|---|---|---|--|-------------|--------|--|--|--|--------|--|--|--|------|---|---|---|---|---|---|---|---|
| I                           | Module LEDs         | LED name                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Detailed introduction                                                                                                                                                                                                                                               |   |        |   |   |   |  |             |        |  |  |  |        |  |  |  |      |   |   |   |   |   |   |   |   |
|                             |                     | Power                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Green LED: ON:The module power supply (Ub) is normal<br>OFF:The module power supply is disconnected                                                                                                                                                                 |   |        |   |   |   |  |             |        |  |  |  |        |  |  |  |      |   |   |   |   |   |   |   |   |
|                             |                     | Bus                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Green LED ON:CC-Link IEF Basic normal communication<br>Red LED ON:CC-Link IEF Basic no communication                                                                                                                                                                |   |        |   |   |   |  |             |        |  |  |  |        |  |  |  |      |   |   |   |   |   |   |   |   |
|                             |                     | RDY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Red LED ON:IO-Link port error, inconsistent with configuration                                                                                                                                                                                                      |   |        |   |   |   |  |             |        |  |  |  |        |  |  |  |      |   |   |   |   |   |   |   |   |
|                             |                     | STAT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Yellow LED: IO-Link communication status (C1 - C8)<br>ON: IO-Link communication is normal<br>OFF: IO-Link communication is not established;                                                                                                                         |   |        |   |   |   |  |             |        |  |  |  |        |  |  |  |      |   |   |   |   |   |   |   |   |
|                             |                     | ERR                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Red LED: IO-Link working status (C1-C8)<br>ON: The port is working abnormally; please check the IO-Link cable or the IO-Link port setting in the DIP<br>OFF: The port is normal; the IO-Link communicates normally or the port is closed or disabled during dialing |   |        |   |   |   |  |             |        |  |  |  |        |  |  |  |      |   |   |   |   |   |   |   |   |
| II                          | Power supply        | Ui ( left ) : Power supply input , 7/8", 5-pin , male<br>Uo ( right ) : Power supply output , 7/8", 5-pin , female                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                     |   |        |   |   |   |  |             |        |  |  |  |        |  |  |  |      |   |   |   |   |   |   |   |   |
| III                         | IO-Link PORT        | <ul style="list-style-type: none"><li>M12 A-code, 5-pin female connector; 4th pin is IO-Link, not compatible with SIO or standard IO mode. 2nd pin is vacant, no external signals allowed.</li><li>In the diagram, "C"" denotes a port. "STAT" and "ERR" represent communication and work status indicators, respectively.</li></ul> For instance, C1 <sup>STAT</sup> <sub>ERR</sub> signifies PORT1, with the upper right LED indicating STAT, and the lower LED indicating ERR. Detailed instructions are in "I". <ul style="list-style-type: none"><li>There are eight independent IO-Link Class A ports, each with its own STAT and ERR. Class B devices require an external power supply.</li></ul> <b>Note: Please turn off unused ports via rotary code, avoiding red lights on the module.</b> |                                                                                                                                                                                                                                                                     |   |        |   |   |   |  |             |        |  |  |  |        |  |  |  |      |   |   |   |   |   |   |   |   |
| IV                          | Bus                 | In(left):CC-Link IEF Basic Bus in,M12,D-Code,4-pin,female<br>Out(right):CC-Link IEF Basic Bus out,M12,D-Code,4-pin,female                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                     |   |        |   |   |   |  |             |        |  |  |  |        |  |  |  |      |   |   |   |   |   |   |   |   |
| V                           | PE                  | Ground connection                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                     |   |        |   |   |   |  |             |        |  |  |  |        |  |  |  |      |   |   |   |   |   |   |   |   |
| VI                          | Network status LEDs | LINK2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Bus in , Green LED:<br>ON:This port communication rate is 100M<br>OFF:This port communication rate is not 100M                                                                                                                                                      |   |        |   |   |   |  |             |        |  |  |  |        |  |  |  |      |   |   |   |   |   |   |   |   |
|                             |                     | ACT2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Bus in , Yellow LED:<br>ON:connected; OFF:no connection; Flashing: data exchange                                                                                                                                                                                    |   |        |   |   |   |  |             |        |  |  |  |        |  |  |  |      |   |   |   |   |   |   |   |   |
|                             |                     | LINK1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Bus out , Green LED:<br>ON:This port communication rate is 100M<br>OFF:This port communication rate is not 100M                                                                                                                                                     |   |        |   |   |   |  |             |        |  |  |  |        |  |  |  |      |   |   |   |   |   |   |   |   |
|                             |                     | ACT1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Bus out , Yellow LED:<br>ON:connected; OFF:no connection; Flashing: data exchange                                                                                                                                                                                   |   |        |   |   |   |  |             |        |  |  |  |        |  |  |  |      |   |   |   |   |   |   |   |   |
| IP address setting          |                     | The default IP address is 192.168.3.*; * refers to the hexadecimal number corresponding to the rotary encoding switch;<br>ADDR_H is the high bit of the hexadecimal number of the address;<br>ADDR_L is the low bit of the hexadecimal number of the address;<br>For example: ADDR_H is A, ADDR_L is 9, then ADDR is 0xA9 IP address is: 192.168.3.169;<br>ADDR_H is 2, ADDR_L is 8, then ADDR is 0x28 IP address is: 192.168.3.40;<br><b>Note: After the rotation code is changed, it will take effect after re-powering</b>                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                     |   |        |   |   |   |  |             |        |  |  |  |        |  |  |  |      |   |   |   |   |   |   |   |   |
| Number of occupied stations |                     | Rotary Code STATION: Sets the number of stations occupied; adjustable range 1~4.<br>According to protocol specifications, one station will allocate RX 64 bits, RY 64 bits, RWr 32 characters, RWw 32 characters.<br>Note: Changes to this rotary code will take effect upon power reset.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                     |   |        |   |   |   |  |             |        |  |  |  |        |  |  |  |      |   |   |   |   |   |   |   |   |
| IO-Link port control        |                     | Rotary code PORT_H PORT_L: Control to open or close 8 IO-Link ports <table><tr><td>Rotary code</td><td colspan="4">PORT_H</td><td colspan="4">PORT_L</td></tr><tr><td>Port</td><td>8</td><td>7</td><td>6</td><td>5</td><td>4</td><td>3</td><td>2</td><td>1</td></tr></table><br>For example: PORT_H:0x02; PORT_L:0x05; the corresponding binary is: 0010 0101 means: open ports C1, C3, C6, and close other ports;<br><b>Note: After the rotation code is changed, it will take effect after re-powering</b>                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                     |   |        |   |   |   |  | Rotary code | PORT_H |  |  |  | PORT_L |  |  |  | Port | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
| Rotary code                 | PORT_H              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                     |   | PORT_L |   |   |   |  |             |        |  |  |  |        |  |  |  |      |   |   |   |   |   |   |   |   |
| Port                        | 8                   | 7                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 6                                                                                                                                                                                                                                                                   | 5 | 4      | 3 | 2 | 1 |  |             |        |  |  |  |        |  |  |  |      |   |   |   |   |   |   |   |   |

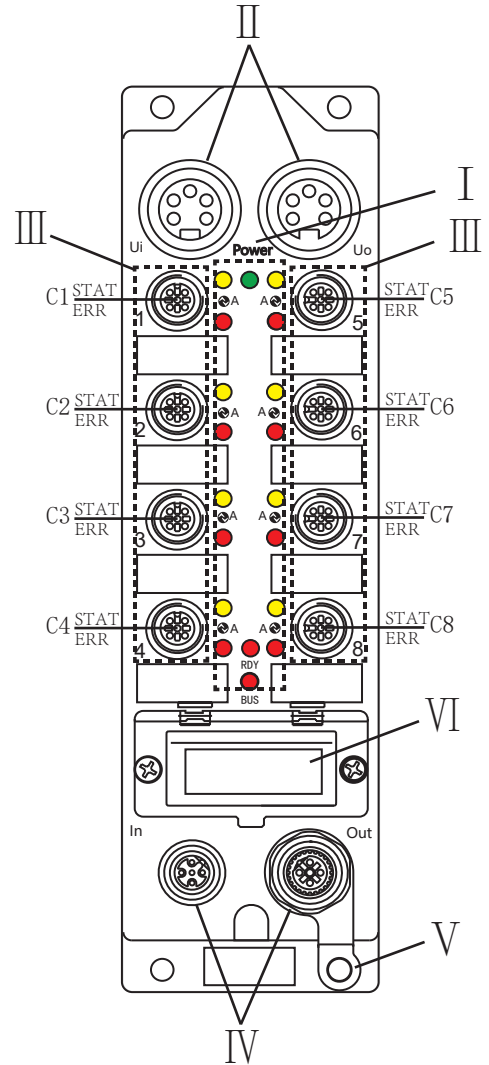

## IO-Link Port Byte Mapping

### IO-Link status

|      | Record (1 for disconnected, 0 otherwise) |    |    |    |    |    |    |    | IO-Link status (1 for communication, 0 none.) |    |    |    |    |    |    |    |
|------|------------------------------------------|----|----|----|----|----|----|----|-----------------------------------------------|----|----|----|----|----|----|----|
| RX   | F                                        | E  | D  | C  | B  | A  | 9  | 8  | 7                                             | 6  | 5  | 4  | 3  | 2  | 1  | 0  |
| Port | C8                                       | C7 | C6 | C5 | C4 | C3 | C2 | C1 | C8                                            | C7 | C6 | C5 | C4 | C3 | C2 | C1 |

|    | C4 port disconnection times |    |    |    | C3 port disconnection times |    |    |    | C2 port disconnection times |    |    |    | C1 port disconnection times |    |    |    |
|----|-----------------------------|----|----|----|-----------------------------|----|----|----|-----------------------------|----|----|----|-----------------------------|----|----|----|
| RX | 1F                          | 1E | 1D | 1C | 1B                          | 1A | 19 | 18 | 17                          | 16 | 15 | 14 | 13                          | 12 | 11 | 10 |

|    | C8 port disconnection times |    |    |    | C7 port disconnection times |    |    |    | C6 port disconnection times |    |    |    | C5 port disconnection times |    |    |    |
|----|-----------------------------|----|----|----|-----------------------------|----|----|----|-----------------------------|----|----|----|-----------------------------|----|----|----|
| RX | 2F                          | 2E | 2D | 2C | 2B                          | 2A | 29 | 28 | 27                          | 26 | 25 | 24 | 23                          | 22 | 21 | 20 |

|      | Byte Swap (1: Swap high and low bytes of the port 0: No swap, default byte order) |    |    |    |    |    |    |    |
|------|-----------------------------------------------------------------------------------|----|----|----|----|----|----|----|
| RY   | 7                                                                                 | 6  | 5  | 4  | 3  | 2  | 1  | 0  |
| Port | C8                                                                                | C7 | C6 | C5 | C4 | C3 | C2 | C1 |

### IO-Link cyclic data

| Occupies 1station 8bytes/port |                                  |           | Occupies 2station 16bytes/port |                                  |           | Occupies 3station 24bytes/port |                                  |           | Occupies 4station 32bytes/port |                                  |           |
|-------------------------------|----------------------------------|-----------|--------------------------------|----------------------------------|-----------|--------------------------------|----------------------------------|-----------|--------------------------------|----------------------------------|-----------|
| Port                          | RW <sub>r</sub> /RW <sub>w</sub> | wregister | Port                           | RW <sub>r</sub> /RW <sub>w</sub> | wregister | Port                           | RW <sub>r</sub> /RW <sub>w</sub> | wregister | Port                           | RW <sub>r</sub> /RW <sub>w</sub> | wregister |
| C1                            | 00h~03h                          |           | C1                             | 00h~07h                          |           | C1                             | 00h~0Bh                          |           | C1                             | 00h~0Fh                          |           |
| C2                            | 04h~07h                          |           | C2                             | 08h~0Fh                          |           | C2                             | 0Ch~17h                          |           | C2                             | 10h~1Fh                          |           |
| C3                            | 08h~0Bh                          |           | C3                             | 10h~17h                          |           | C3                             | 18h~23h                          |           | C3                             | 20h~2Fh                          |           |
| C4                            | 0Ch~0Fh                          |           | C4                             | 18h~1Fh                          |           | C4                             | 24h~2Fh                          |           | C4                             | 30h~3Fh                          |           |
| C5                            | 10h~13h                          |           | C5                             | 20h~27h                          |           | C5                             | 30h~3Bh                          |           | C5                             | 40h~4Fh                          |           |
| C6                            | 14h~17h                          |           | C6                             | 28h~2Fh                          |           | C6                             | 3Ch~47h                          |           | C6                             | 50h~5Fh                          |           |
| C7                            | 18h~1Bh                          |           | C7                             | 30h~37h                          |           | C7                             | 48h~53h                          |           | C7                             | 60h~6Fh                          |           |
| C8                            | 1Ch~1Fh                          |           | C8                             | 38h~3Fh                          |           | C8                             | 54h~5Fh                          |           | C8                             | 70h~7Fh                          |           |

Note: RW<sub>r</sub>: Slave-to-master input; RW<sub>w</sub>: Master-to-slave output. Units: RW<sub>r</sub>/RW<sub>w</sub> - characters; IO-Link - bytes.

Below: character-byte relationship.

| IO-Link BYTE1 High Byte          |   |   |   |   |   |   |   |   | IO-Link BYTE0 Low Byte |   |   |   |   |   |   |   |  |
|----------------------------------|---|---|---|---|---|---|---|---|------------------------|---|---|---|---|---|---|---|--|
| RW <sub>r</sub> /RW <sub>w</sub> | F | E | D | C | B | A | 9 | 8 | 7                      | 6 | 5 | 4 | 3 | 2 | 1 | 0 |  |

