


M8 Field-Wireable Connector

BZSM3-0

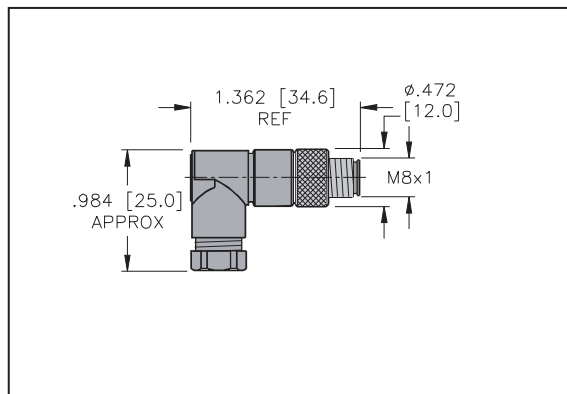

- M8 Field-Wireable Connector
- Male , 3-pin, Angle
- Plastic shell


Technical parameter

Electrical parameter

Rated voltage	10-30V
Rated current	4A
Insulation resistance	$\geq 10^9 \Omega$
Ambient temperature range	-40...+85°C
Cable diameter	3...5 mm
Contacts	CuZn-Ni
Seal	Viton(FPM)Plastic
Type of protection	IP67, (screwed together)
Coupling nut/screw	Nickel-plated
Core cross-section	3 x 0.25 mm ²

Wiring diagram

Contact assignment



M8 Male